

Cutters & Pliers

Wire strippers

Crimpers

Tweezers

Screwdrivers & Wrenches

Metal working

Parts boxes

Tool cases

Tool kits

Soldering irons & Solder

Parts & Solder removal equipment

Measuring instruments

Optical equipment

Artistic products

Clean products

Chemical products

Maintenance & Safety products

Safety glasses

Oilers

Work stand

Measuring instruments

Lights

Shielding booth

Demagnetizers

Z-634 / 637 SAFETY GLASSES



- Conforms to the ANSI Z87.1 USA safety standard
- Hard coating surface resists scratching.
- The Z-634 Can be worn over glasses.



Example of Z-634 usage

Temple length is adjustable (4 steps)



Z-637



Z-634

| Part No. | Material | Lens thickness mm | Adjustable temple length | Weight g |
|----------|---|-------------------|--------------------------|----------|
| Z-634 | Polycarbonate | 2.3 | None | 52 |
| Z-637 | Nylon (frame) PVC (nose pad) Polycarbonate (lens) | 2 | 4-step adjustment | 32 |

Z-64 PRECISION OILER

- Material: Nozzle (stainless), Protective cap (polypropylene), valve (brass), O-ring (nitrile rubber), container (polyethylene), packing (polyethylene foam), container cap (polyethylene)
- Bottle: 9 mL
- Overall length: 133 mm
- With leak prevention mechanism (needle valve)
- With protective cap




Needle valve



Inner dia.: 0.3 mmφ

9mL

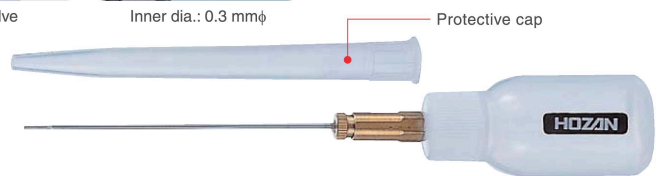

Protective cap

Z-101 UTILITY CART

CAPACITY
60kg

- Load capacity: 60 kg (when not moving)
 - External dimensions: 700 (W) × 630 (H) × 500 (D) mm
 - Small parts tray (drawer) : 180 × 150 mm
 - With work mat (fixed)
 - With 4 casters (65 mmφ / including 2 stoppers)
 - Weight: 14.5 kg
- * To be assembled by the user.






Small parts tray

Casters with stops

Z-390 AIR DUST GUN

- An air curtain enhances safety and cleanliness by preventing dust and cutting particles, etc., from blowing back at the user.
- Nozzle bore: 2 mmφ
- Nozzle length: 93 mm
- Standard air pressure: 0.4 to 0.6 Mpa
- Required air compressor: 0.4 kW or higher
- Overall length: 190 mm
- Weight: 250 g

* Requires a separate compressor as the air source.

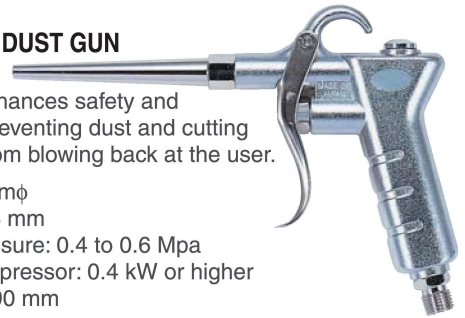

Optional parts

Z-391 AIR HOSE COUPLER

- Male coupler for connecting the Z-390 to an air hose coupler.

Z-392 AIR HOSE JOINT

- Dedicated joint for connecting the Z-390 directly to an air hose.
- Compatible hose: 1/4" (6.35 mm)


Z-340 LEVEL GAUGE



- Sensitivity: 0.5 mm / m (=0.03°)
- Accuracy: ± 2.5 mm / m (± 0.14° or less)
- External dimensions: 75 (W) × 25 (H) × 15 (D) mm
- Weight: 31 g



Simultaneous 2-direction tilt check is possible.



* The sensitivity is the tilt angle at which bubble motion can be perceived by the eye. The accuracy is the level's overall measurement error.

Z-341 MEASURE TAPE

- Measurement: 2 m long (no stopper)
- External dimensions: 49 (W) × 49 (H) × 20 (D) mm
- JIS Class 1
- Weight: 68 g



New stepped millimeter graduations prevents misreading.



ALCP-1955KD



ALCP-2555KD



ALCP-1620KD



ALCP-1635KD



RULES Increasing height of each mark makes it easier for eye to distinguish 1mm steps

CARPENTER'S SQUARES

ANGLE SQUARES

SCALE

USE • Measure dimensions

MATERIAL

- Body: ABS, Rubber
- Tape: SK4 tool steel (Nylon coated)

FEATURES

- Increasing height of each mark makes it easier for eye to distinguish 1mm steps
- Repeating digit type for large, easy to read numbers.
- Auto-lock engages when tape is pulled to prevent retraction
- Water resistant Nylon-coated tape
- Tape standard: JIS class 1
- Non-slip rubber grip



With belt clip and strap for easy carrying

| Order No. | Model No. | Max measuring length (m) | Tape width (mm) | Weight |
|------------|-------------|--------------------------|-----------------|--------|
| NEW 111196 | ALCP-1620KD | 2.0 | 16 | 110g |
| NEW 111197 | ALCP-1635KD | 3.5 | 16 | 140g |
| NEW 111198 | ALCP-1955KD | 5.5 | 19 | 270g |
| NEW 111199 | ALCP-2555KD | 5.5 | 25 | 340g |